

TITAN 4510CHC

High speed overedging for heavy carpet (up to 18 mm)
with 10, 15 or 19 mm wide stitch.

APPLICATIONS

Special model to sew a normal 10 to 12 mm stitch on extra thick carpets or to sew large overedge of 15 or 19 mm on the border of carpets.



ALWAYS INCLUDED

- CP/4500 DAC : pneumatic footlift

OPTIONS STRONGLY ADVISED


- MEM/2500 : electronic motor
- SET 30566 : tape guide
- RPE/4500 : external density adjuster
- NCV/2500 : needle cooler
- DCD/4500 : cutting device
- 2600S DAC : long puller
- FH : oil filter

REMARKS

- 4510CHC/3 : 3-threads overedging machine available

SPECIFICATIONS

SPEED	3200 stitches pro minute			
STITCH WIDTH	10, 12, 15 or 19 mm			
DENSITY OF STITCHES	3 to 5 stitches/cm			
THREADS	Most types of threads			

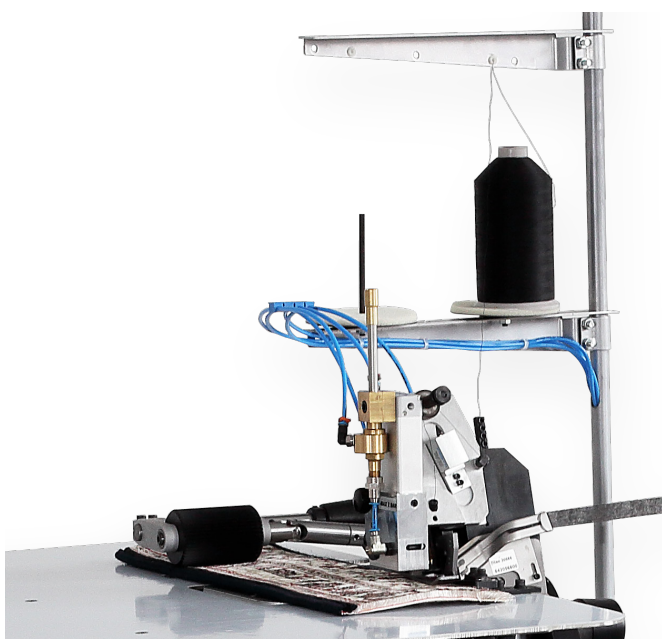

SPEED	STITCH WIDTH	THICKNESS	FABRIC FEED	NEEDLES
				
3200 spm	10 mm	18 mm	Bottom	1