

TITAN 4510CHX

High speed ultra small 4 mm overedging of handlook carpets with maximum carpet thickness up to 18 mm.

APPLICATIONS

Ultrasmall 4 mm overedging on woven.
Handlook type of carpets.



Three threads stitch



Two threads stitch

ALWAYS INCLUDED

- DCD/4500 : cutting device
- CP/4500 DAC : pneumatic footlift
- Carbured feeddog
- Special pile pusher

OPTIONS

- RPE/4500 : external stitch density
- MEM/4500 : electronic motor
- B/4500 : table and stand
- Also available in 3 threads stitch (see FIG 2).
- 2600S DAC : long puller
- SET 30566 : tape guide
- NCV/2500 : needle cooler
- FH/4500 : oil filter
- TAP/2500 : special upper table

REMARKS

- 4510CHX/3 : 3-threads overedging machine available

SPECIFICATIONS

SPEED

3200 stitches pro minute
(high speed serger)

STITCH WIDTH


fixed stitch of 4 mm wide

DENSITY OF STITCHES

5 to 20 stitches / cm

THREADS

Most types of thin threads

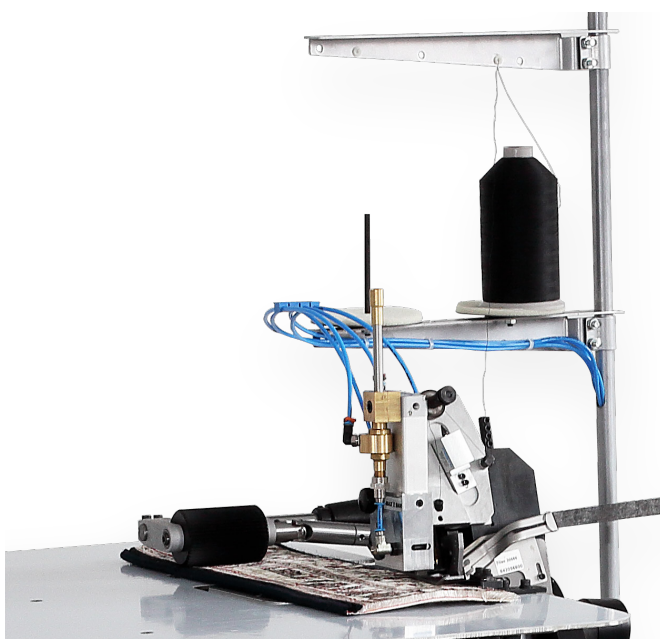

SPEED	STITCH WIDTH	THICKNESS	FABRIC FEED	NEEDLES
3200 spm	4 mm	18 mm	Bottom	1