

TITAN 2300


One thread decorative overedging for carpets.

APPLICATIONS

Produces decorative stitch with one thread on carpet.



Back

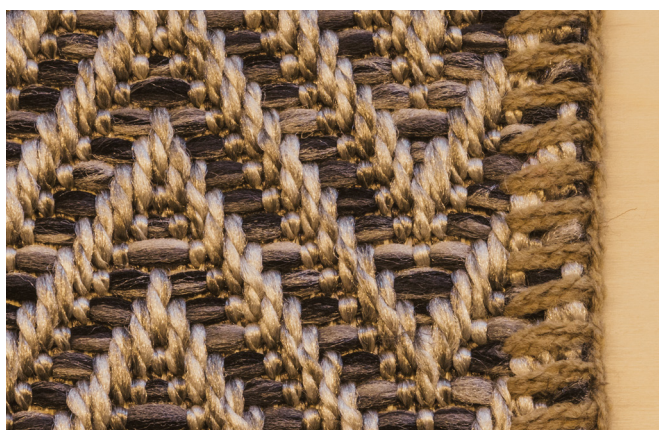

Front

ALWAYS INCLUDED

- RPE : stitch density adjuster

OPTIONS

- CP/3200 : pneumatic pressure foot lifter
- DF/2200 : thread unwinder advised
- FYF/2200 : power supply for thread unwinder advised
- MEM : electronic motor

REMARKS

- TITAN 2300L : left hand version available for automatisisation

SPECIFICATIONS

SPEED

800 stitches pro minute

DENSITY OF FRINGES

3 to 6 stitches/cm

STITCH WIDTH

Fixed 12 mm or 15 mm



SPEED	THICKNESS	FABRIC FEED	NEEDLES
			
800 _{spm}	10 _{mm}	Bottom	1