

TITAN 2500AHC


Overedging carpets for car, plane and boat.

APPLICATIONS

This model allows to sew external or internal curves of a small diameter. The machine is always fitted with a pneumatic footlift and tension opener to make it easier to manipulate the carpet while sewing.



Standard : 2 threads

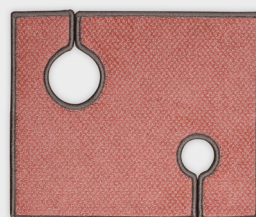

Model DK2500AHC/3 : 3 threads

OPTIONS STRONGLY ADVISED


- RPE/2500 : external density adjuster to change n° of stitches
- TA/2500 : AHC upper table
- FH/2500 : oil filter
- SET 30566 : tape guide
- MEM/2500 : electronic motor
- NCV/2500 : needle cooler
- BW/2500 : blower for high pile carpets

REMARKS

- It can sew carpets with smaller inside radius
- Thicker qualities of carpets
- Better visibility for the operator
- Easier to operate with new pneumatic foot
- Easier threading and improved sewing quality
- Combined with electronic motor (MEM) it can sew perfect square corners
- 2500AHC/3 : 3-thread overedging machine available
- 4500AHC : high speed version available

SPECIFICATIONS

SPEED	2800 stitches pro minute
STITCH WIDTH	10 to 12 mm
DENSITY OF STITCHES	1 to 10 stitches/cm
THREADS	Most types of threads

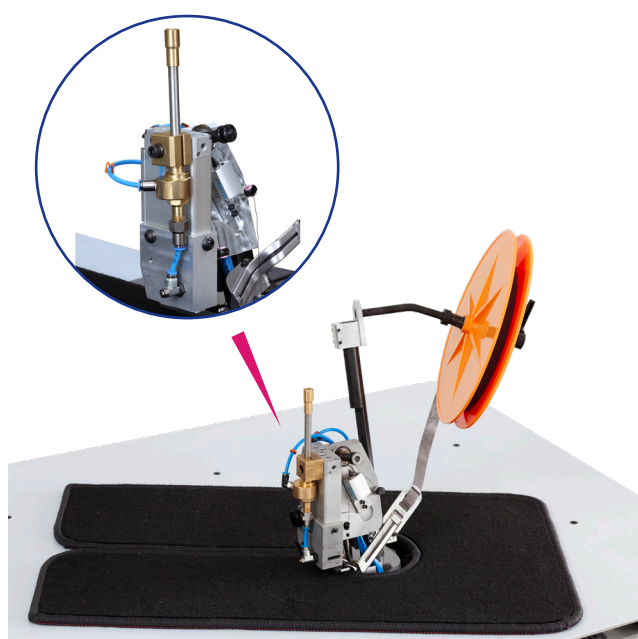

SPEED	STITCH WIDTH	THICKNESS	FABRIC FEED	NEEDLES
 2800 _{spm}	 10 _{mm}	 10 _{mm}	 Bottom	 1