

TITAN 4500CHC

High speed right- and lefthand compact carpet overedging.
Can be included in fully automatic lines.

APPLICATIONS

Many internal and external parts have been redesigned to obtain a high speed (3200 rpm) machine with longer lifetime.



ALWAYS INCLUDED

- CP/4500-DAC : pneumatic footlift

OPTIONS

- RPE/4500 : external stitch density
- DCD/4500 : cutting device
- 2600S-DAC : long puller
- SET 30566 : tape guide
- MEM/2500 : electronic motor
- NCV/2500 : needle cooler
- FH/FK4500 : oil filter + cooling

REMARKS

- Left- and righthand versions are available for automatisaton
- Oil filter with cooling is strongly advised
- 4510CHC : high speed version for thicker carpets available
- 4500CHC/3 : 3-thread overedging machine available

SPECIFICATIONS

SPEED

Max 3500 stitches pro minute

STITCH WIDTH

Working speed 3200 rpm

DENSITY OF STITCHES


10 to 12 mm

THREADS

1 to 10 stitches/cm

Most types of thin threads

Carburated feeddog included

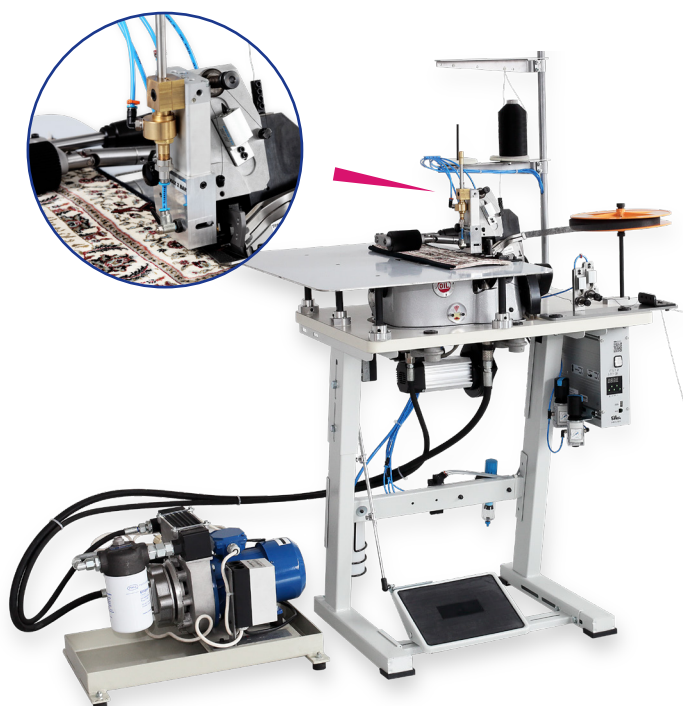

SPEED	STITCH WIDTH	THICKNESS	FABRIC FEED	NEEDLES
3200 rpm	10 mm	12 mm	Bottom	1